


## [ 7 ] INSTALLATION PRECAUTIONS/NOTES


1. When drilling, use the specified drill bit and keep the electric drill and drill bit perpendicular to the drilled surface.
2. When this product becomes dirty, clean it with mild detergent using a sponge. Never use thinner or other alkaline or acid organic solvents.
3. Be careful not to scratch this product or parts of the vehicle during installation.
4. The protector is made of plastic. Be careful not to damage it when handling it.
5. When removing the vehicle parts, refer to the vehicle service manual.
6. Completely clean and degrease the mounting surface with a cloth where the protector will be attached.
7. Jack up the rear part of the vehicle to make it easier to install the protector.  
Be sure to give this installation manual to customer after installation is complete.

## [ 8 ] Installation Preparation


1. Apply masking tape to rear fender panel near rear bumper to protect panel from scratch. Following the vehicle service manual, remove the rear combination lamps.
2. Following the vehicle service manual, remove the rear diffuser.
3. Cutting paper template sheet ⑨ into individual templates

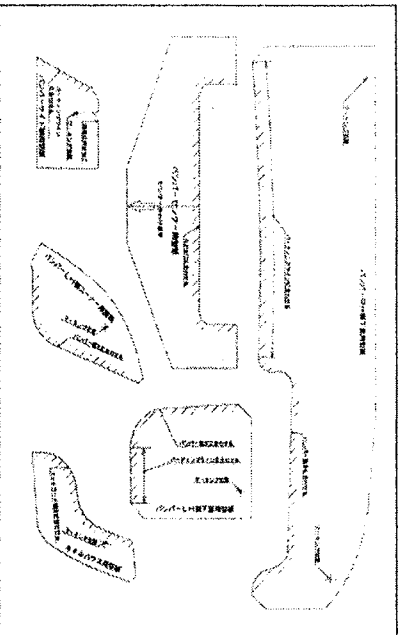

### 4. Marking the center of rear under protector ①

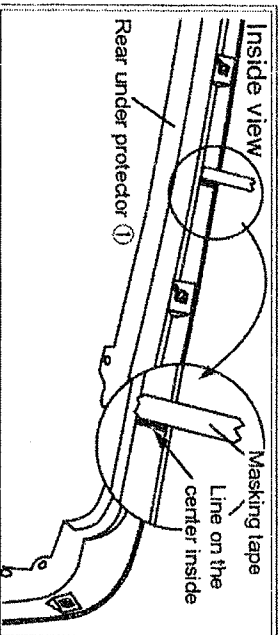

### Section of aligning masking tape

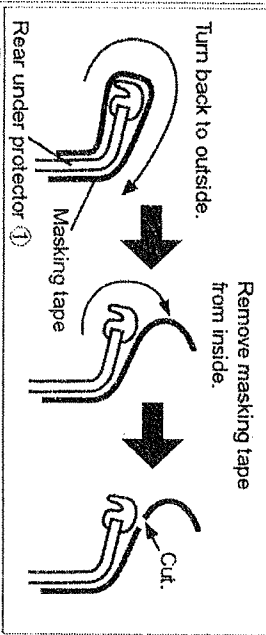

- (1) As illustrated, align masking tape to the line on the center inside of rear under protector ①.
- (2) Turn back masking tape from inside to outside. Tape it.
- (3) Remove masking tape from inside of rear under protector ①.
- (4) Cut the removing part of masking tape.

### ⚠ Caution

Only remove masking tape on the inside of rear under protector ①. Do not remove masking tape on the outside of rear under protector ①.

## [ 9 ] Installation Procedure

( This installation instruction manual shows how to install the left side. Please use same procedure to install the right side. )