




4. Marking the positions on the side part of the rear bumper

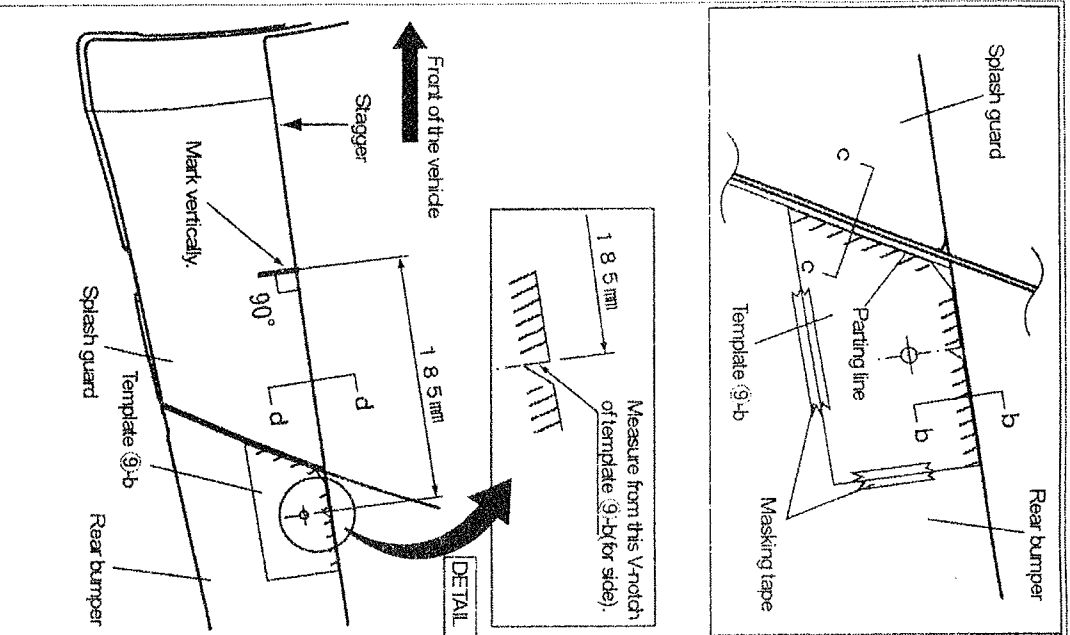

- (1) Align the V-notch side of template ⑨-b to the stagger of the rear bumper and align the other side of the template to the parting line of the side part of the rear bumper as illustrated. Secure the template in position with masking tape.

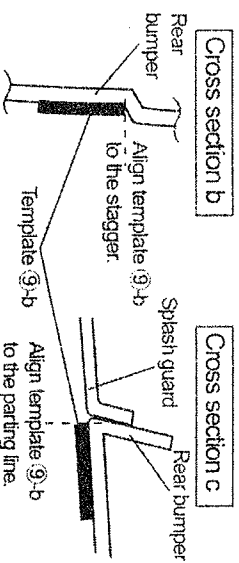


- (2) Center punch at the center of the hole of template ⑨-b on the rear bumper. (1 position)
- (3) Vertically mark the position 185 mm from the V-notch of template ⑨-b on the upper line of the splash guard with a felt pen as illustrated.

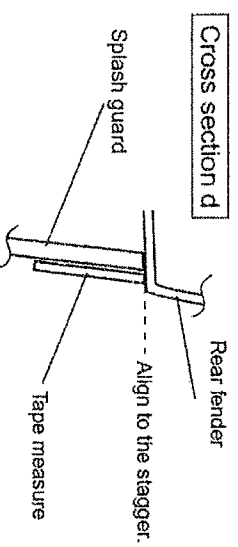

⚠ Caution

Do not tear template ⑨-b because it will be used again when carrying out the same work for the right side.

5. Center punching at the position on the splash guard

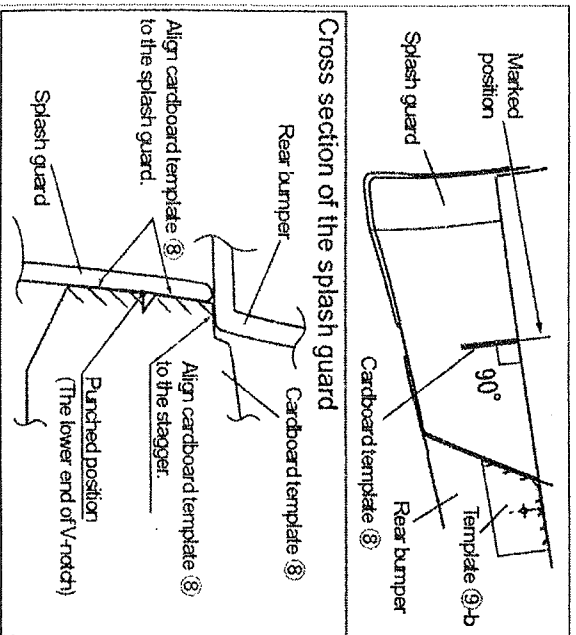

- (1) Vertically to the stagger line, align the "for side)" side of the cardboard template ⑧ to the marked positions on the splash guard in the procedure 4.-(3) and center punch at the lower end of V-notch of cardboard template ⑧. (1 position)

⚠ Caution

Use cardboard template ⑧.

Center punch at the lower end of V-notch of the "for side)" side of the cardboard template ⑧.