


19. Fixing rear under protector ① to the rear bumper <3>

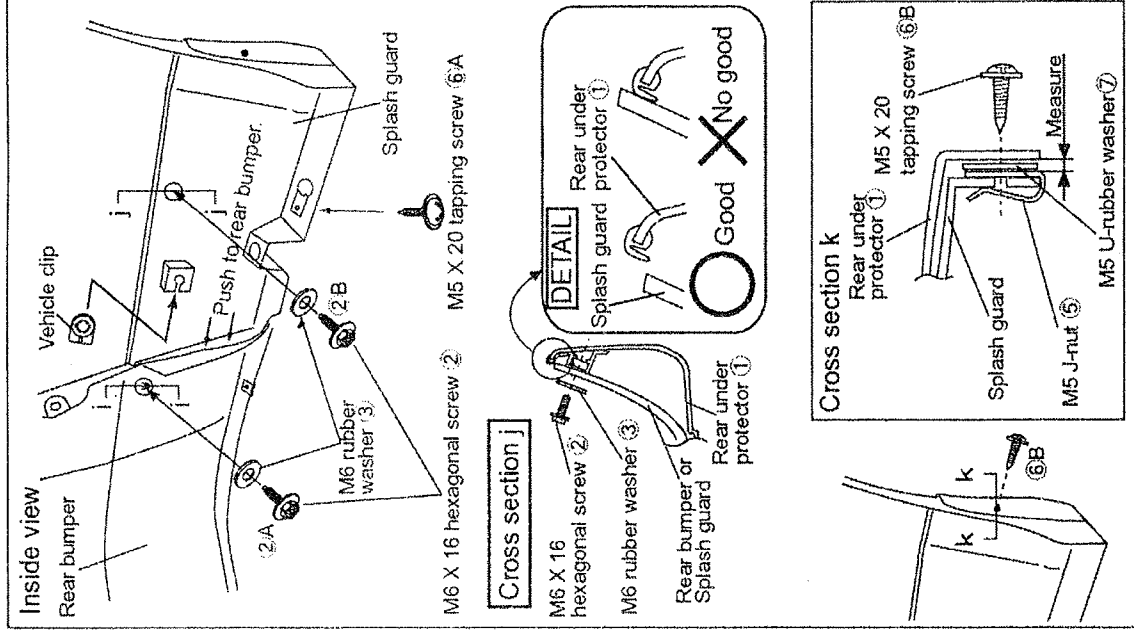

- (1) Fix the retainer part of rear under protector ① to the rear bumper with M6 X 16 hexagonal screw ② and M6 rubber washer ③ as illustrated. (1 position ②A)


△Caution

Install rear under protector ① above the stagger line of rear bumper. See cross section i

- (2) Insert the splash guard into the rear bumper so that the gap between them does not appear. Fix the retainer part of rear under protector ① with M6 X 16 hexagonal screw ② and M6 rubber washer ③ as illustrated. (1 position ②B)
- (3) Fix the lower part of splash guard with M5 X 20 tapping screw ⑥A.
- (4) Insert the vehicle clip into the splash guard. (1 position)

- (5) Fix the wheel house part with M5 X 20 tapping screw ⑥. (1 position ⑥B) Use M5 U-rubber washer ⑦. Tighten while maintaining no gap or minimum gap between splash guard and bumper at the joint and maintaining the top of splash guard and protector in parallel.

20. Fixing rear under protector ① to the rear bumper <4>

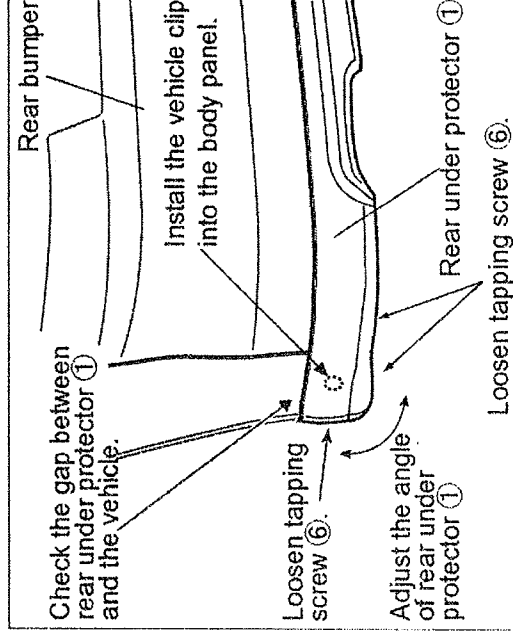

- (1) Using 2 people, fix the rear bumper, rear under protector ① and splash guard into the vehicle.

△Caution

Be sure to firmly install the vehicle clip inserted into the splash guard in the procedure 19.-(4) into the body panel.

- (2) Remove the gum tape applied in the procedure 17.-(1).
- (3) If there is gap between rear under protector ① and the vehicle, loosen tapping screw ⑥ of wheel house and lower part to adjust the angle of rear under protector ①.